

POYO

### Poyo 系列安装说明书

Poyo series installation instructions

1.

系 列			
85141B1	85142B1	86141B1	85141C1
85142C1	86141C1	86141D1	86141E1
86141F1	86141F1-CTM0101		

警告：86141C1、85141C1，灯具的安装位置应使其不会长时间在小于1.1m的距离被盯着看！

### 安装步骤 一

此步骤适合带电器盒安装。

**1.1** 在天花或安装棚等安装位置开 $\varnothing 25\text{mm}$ 的电源线过线孔，并引出电源线。

**1.2** 断电情况下，灯具接好电源线。

**1.3** 逆时针旋转扭出背部安装盒。

型号85142C1款灯体内部有两块缓冲纸卡，取出丢入垃圾桶再进行下一步安装。

2.

**1.4** 用四颗自攻螺丝从安装盒两侧将安装盒固定在安装位置。

**1.5** 将灯体顶部凹型缺口部分对准安装盒凸出柱头，灯体向上推到顶住天花板。

**1.6** 顺时针转动灯体，听到波珠“咔”声表示安装到位，通电点亮确认安装完成。

具体外观以实物为准！

### 安装步骤 二

此步骤适合不带电器盒安装。

3.

**2.1** 参照步骤1.1在安装位置打孔。

**2.2** 逆时针旋转扭出背部安装盘。

**2.3** 用螺丝将安装盘锁定在天花安装位置。

**2.4** 从天花引出电源线与灯具电源线连接。

**2.5** 顺时针转动灯体，听到波珠“咔”声表示安装到位，通电点亮确认安装完成。


4.

## 更换光学配件：


可选配件：蜂窝网、十字格栅、柔光片

此步骤仅适合85141B1 85142B1 85141C1 85142C1更换光学配件。


**3.1** 如需更换光学配件：断电后，逆时针方向取下防眩环



**3.2** 取下防眩环后，更换需要的光学配件



**3.3** 更换光学配件后，再顺时针方向扭紧防眩环，更换完成。



不要用手或者毛巾拭擦芯片与反射器！  
Do not clean LED chip and reflector with hand or towel !




- 只能使用符合IEC或CCC安全标准的电源；
- 检查电源是否匹配灯具；
- 须考虑到最大电流值；
- 灯具上显示电压不是用来选择恒压电源，而是表示所选择恒流电源所覆盖的电压；
- 采用合适的ESD措施，避免触摸裸导体；
- 若与某种化学物质或气体接触，LED芯片会受损；
- 因此不能用化学物质清理LED壳体或LED驱动灯，如下物质证实对灯具的性能有负面影响，不能与LED灯具处在同一环境下。

指甲油  
超能胶水  
乙二醇  
甲醛  
LOCTITE胶水  
漂白粉，含漂白粉的清洁剂、喷雾剂  
LOCTITE 384胶  
LOCTITE 7387 活化剂


- 将绝缘物移开或提供足够空间以便灯具本身的温升不会超过额定的；
- LED芯片对开关瞬态很敏感，因此LED灯具与电器必须在断电状态下连接，不可热插拔。
- VF建议使用灯具说明书上指示的电源。
- 须顾及到产品的极性。
- 如果此灯具的外部软缆或软线损坏了，该线要由制造商或其服务代理商或有类似资格的人更换
- 此灯具内的光源应由制造商或其服务代理商或有类似资格的人来更换

- Use only drivers that comply with IEC or CCC safety standards.
- Check if the power supply match with the luminaire.
- Must consider the maximum current value displayed on the label of the luminaire.
- The voltage displayed on the luminaire is not used to select the constant voltage driver, but the voltage covered by the selected constant current driver.
- Take suitable ESD measures to avoid touching bare conductors.
- LED chips can be damaged if be in touch with chemical material or gas. Therefore, it is not allowed to clean the LED housing or luminaire by chemicals.
- The following items are confirmed to have negative impact on the performance of the luminaire, avoid to keep luminaire in the same circumstance with them.
  - Methyl acetate or ethyl acetate (i.e., nail polish remover)
  - Cyanoacrylates (i.e., "Superglue")
  - Glycol ethers (including Radio Shack ® Precision Electronics Cleaner - dipropylene glycol monomethyl ether)
  - Formaldehyde or butadiene (including Ashland PLIOBOND ® adhesive)
  - Dymax 984-LVUF conformal coating
  - Loctite Sumo Glue、Loctite 384 adhesive、Loctite 7387 activator
  - Gorilla Glue、Bleach, Bleach-containing cleaners, sprays

- Remove the insulation material from the luminaire or provide enough space so that the temperature raising will not overpass the limited TC.
- LED chip is very sensitive to switching transients, therefore, LED lamps and appliances must be connected after power cut off, no hotswappable.
- VF recommends using the driver indicated on the luminaire manual.
- Must consider the polarity of the product.
- If the external flexible cable or cord of this lamp is damaged, the cord should be replaced by the manufacturer or its service agent or a similarly qualified person
- The light source in this lamp should be replaced by the manufacturer or its service agent or a similarly qualified person

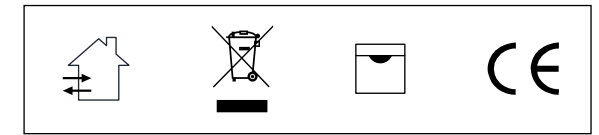

 适用于室内环境与特定户外环境。  
Suitable for indoor environment and specific outdoor environment

 内置LED驱动，明装式安装。  
LED driver is built in, Open Installation.

爱加照明科技有限公司

广东省东莞市大朗镇洋乌村乌石岭三区438号  
Tel: 0769-8539 7723 / 8539 7729 Fax: 0769-8258 3418  
E-mail: info@vflighting.com Http: //www.vflighting.com